

Features


- 15" bass reflex design combined with 4"/2.5" coaxial compression driver
- Maintained low frequency performance at full power
- Mounting points for fixed installation
- 2x NLT4 on the rear
- M10 Thread for pole adapter
- All Quint Audio loudspeakers are designed for use in combination with Quint Audio processors & amplifiers
- All Quint Audio loudspeaker presets are matched in level and phase at the crossover frequency for easy mix & match
- Factory system presets available

Applications

- Stand alone full range loudspeaker

Construction


- Birch plywood enclosure
- Durable hybrid coating, resistant to wear, impact, and weathering
- Klotz internal wiring
- Neutrik speakON® connectors
- Powder coated steel grilles with acoustically transparent fabric on the back

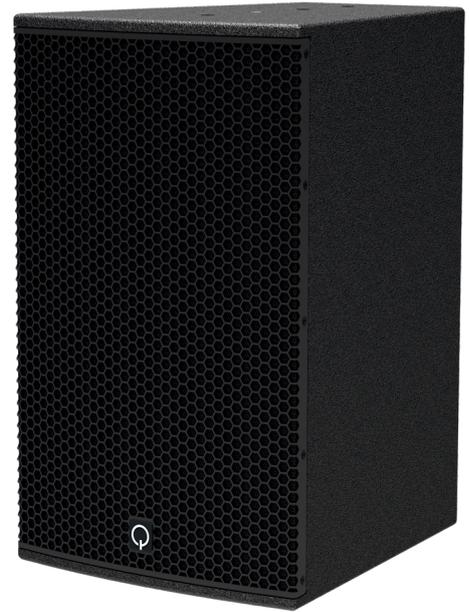


Model	C14
Filter	2-channel DSP control
Loudspeaker components	15"/4"/2.5"
Impedance	8 Ohm
Peak SPL* / Freq. range (-6db)	138dB / 33Hz-20kHz
Max SPL* / Freq. range (-6db)	120dB / 33Hz-20kHz
Max SPL -10db / Freq. range (-6db)	N/A
Max SPL -20db / Freq. range (-6db)	N/A
Dispersion (HxV)	70° x 40°
Connections	2x 4-pole speakON
Weight	31kg
Size (WxHxD)	425 x 685 x 515mm

* Measurements are conform to AES75 and carried out with P9 processor and A42 amplifier. Values are scaled to 1m free field.


Accessories



C4-V1



C4-H1



C4-B1

