

## Features

- 2x 6.5" bass reflex design combined with 1.7" compression driver
- Extended low frequency response at reduced power
- Tool free mountable U-bracket
- Mounting points for fixed installation
- 2x NL4 on the rear
- M10 Thread for pole adapter
- M10 Thread on bottom, M10 thread on top, M10 threads on left and right
- All Quint Audio loudspeakers are designed for use in combination with Quint Audio processors & amplifiers
- All Quint Audio loudspeaker presets are matched in level and phase at the crossover frequency for easy mix & match
- Factory system presets available



## Applications

- Top loudspeaker in combination with a subwoofer
- Live monitoring


## Construction

- Birch plywood enclosure
- Durable hybrid coating, resistant to wear, impact, and weathering
- Neutrik speakON® connectors
- Powder coated steel grille with acoustically transparent fabric on the front

Model	U26i
Filter	1-channel DSP control
Loudspeaker components	2x6.5"/1.7"
Impedance	8 Ohm
Peak SPL* / Freq. range (-6db)	127dB / 100Hz-19kHz
Max SPL* / Freq. range (-6db)	113.5dB / 100Hz-19kHz
Max SPL -10db / Freq. range (-6db)	103.5dB / 63Hz-19kHz
Max SPL -20db / Freq. range (-6db)	N/A
Dispersion (HxV)	50° x 90°
Connections	2x 4-pole speakON
Weight	15kg
Size (WxHxD)	575 x 200 x 300mm

\* Measurements are conform to AES75 and carried out with P9 processor and A42 amplifier. Values are scaled to 1m free field.

## Accessories

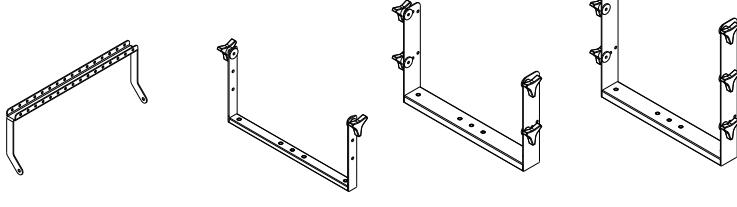

H26-B1

H26-H1

H26-H2

H26-H3

