

L10

Full range line array module for touring

FEATURES

- 10" bassreflex design combined with 2x 1.7" compression driver
- Extended low frequency response at reduced power
- Integrated rigging system for use with L-series modules
- 2x NLT4 2x NL8 on the rear
- 4x ergonomic handles, 2x on the rear, 1x on the left, 1x on the right
- Truck size cabinet for efficient transportation
- All Quint Audio loudspeakers are designed for use in combination with Quint Audio processors & amplifiers
- All Quint Audio loudspeaker presets are matched in level and phase at the crossover frequency for easy mix & match
- Factory system presets available

APPLICATIONS

- Full range line source

CONSTRUCTION

- Birch plywood enclosure
- Durable hybrid coating, resistant to wear, impact, and weathering
- Klotz internal wiring
- Neutrik speakON® connectors
- Powder coated steel grille with acoustically transparent fabric on the back




Model	L10
Filter	2-channel DSP control
Loudspeaker components	10"/2x1.7"
Power handling AES (W)	400/120
Power handling peak (W)	1600/480
Impedance	10 Ohm
Peak SPL* / Freq. range (-6db)	133.5dB/100Hz-20kHz
Max SPL* / Freq. range (-6db)	117dB/100Hz-20kHz
Max SPL -10db / Freq. range (-6db)	107dB/40Hz-20kHz
Max SPL -20db / Freq. range (-6db)	97dB/35Hz-20kHz
Dispersion (HxV)	80° x 12°
Connections	2x 8-pole speakON 2x 4-pole speakON
Weight	21kg
Size (WxHxD)	580 x 270 x 450mm


* Measurements are conform to AES75 and carried out with P9 processor and A42 amplifier. Values are scaled to 1m free field.

L10 — Directivity

QUINT AUDIO

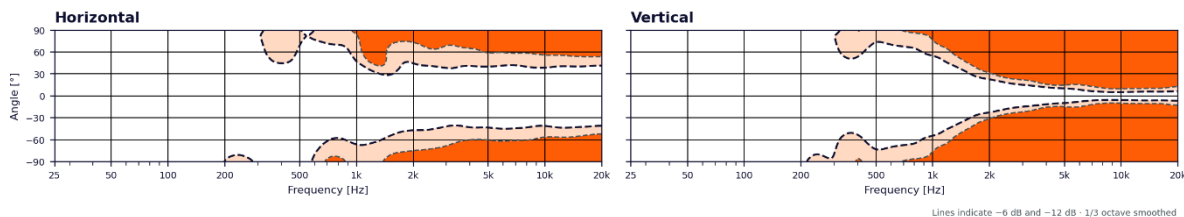

Accessories

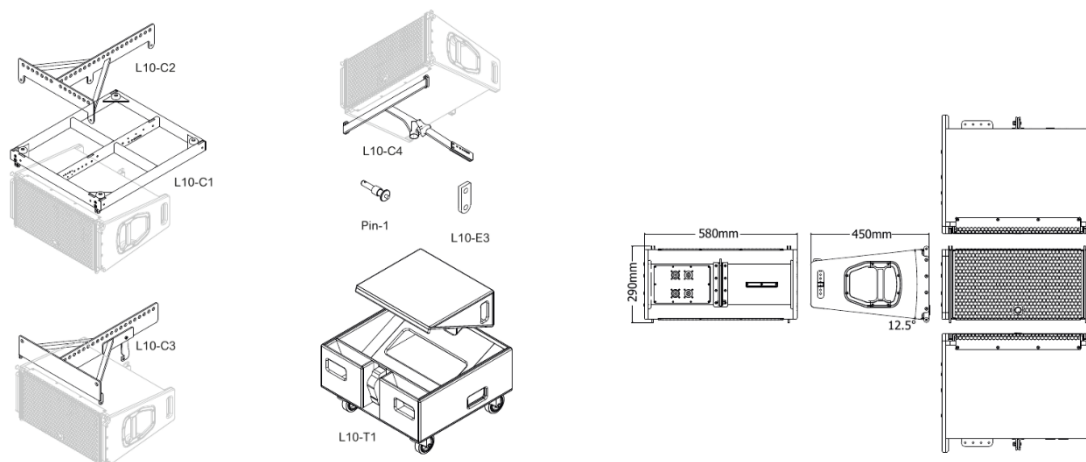

L10

Architectural specifications

- The passive full range line array module loudspeaker shall consist of one 10" low frequency driver in a bass reflex design and two 1.7" compression drivers, with a nominal impedance of 10 ohms, designed for touring applications as a full range line source.
- The loudspeaker shall only be operated by a dedicated, compatible Quint Audio processor and amplifier (e.g., P9 processor and A42 amplifier) using 2-channel DSP control.
- The cabinet enclosure shall be made from birch plywood with a durable hybrid coating resistant to wear, impact, and weathering.
- The drivers shall be protected by a powder-coated steel grille with acoustically transparent fabric backing.
- The cabinet shall incorporate four ergonomic handles (two on the rear, one on the left, one on the right), an integrated rigging system for use with L-series modules, and truck-size design for efficient transportation.
- The connection panel on the rear shall be fitted with two NLT4 (4-pole speakON) and two NL8 (8-pole speakON) connectors.
- The dispersion shall be 80° x 12°.
- The peak sound pressure level shall be 133.5 dB over a frequency range of 100 Hz to 20 kHz (-6 dB). The maximum continuous SPL shall be 117 dB over the same range. At -10 dB, the maximum SPL shall be 107 dB over 40 Hz to 20 kHz. At -20 dB, the maximum SPL shall be 97 dB over 35 Hz to 20 kHz.
- The dimensions (W x H x D) shall not exceed 580 x 270 x 450 mm and shall weigh no more than 21 kg.
- The loudspeaker shall be the L10 by Quint Audio.