

T15

Full range point source for touring

FEATURES

- 15" bass reflex design combined with 3.5" compression driver
- Maintained low frequency performance at full power
- Quint Audio Quick Lock system on top
- Tool free mountable U-bracket
- 2x NLT4 on the rear
- 35mm Pole mount on bottom
- 3x ergonomic handles, 1x on the left, 1x on the right, 1x on the top
- Rubber feet for stability on the bottom
- All Quint Audio loudspeakers are designed for use in combination with Quint Audio processors & amplifiers
- All Quint Audio loudspeaker presets are matched in level and phase at the crossover frequency for easy mix & match
- Factory system presets available

APPLICATIONS

- Stand alone full range loudspeaker

CONSTRUCTION

- Birch plywood enclosure
- Durable hybrid coating, resistant to wear, impact, and weathering
- Klotz internal wiring
- Neutrik speakON® connectors
- Powder coated steel grille with acoustically transparent fabric on the back




Model	T15
Filter	1-channel DSP control
Loudspeaker components	15"/3.5"
Power handling AES (W)	1200
Power handling peak (W)	4800
Impedance	8 Ohm
Peak SPL* / Freq. range (-6db)	137dB / 33Hz-20kHz
Max SPL* / Freq. range (-6db)	120dB / 33Hz-20kHz
Max SPL -10db / Freq. range (-6db)	N/A
Max SPL -20db / Freq. range (-6db)	N/A
Dispersion (HxV)	70° x 40°
Connections	2x 4-pole speakON
Weight	35kg
Size (WxHxD)	430 x 695 x 465mm



* Measurements are conform to AES75 and carried out with P9 processor and A42 amplifier. Values are scaled to 1m free field.

T15 — Directivity

QUINT AUDIO

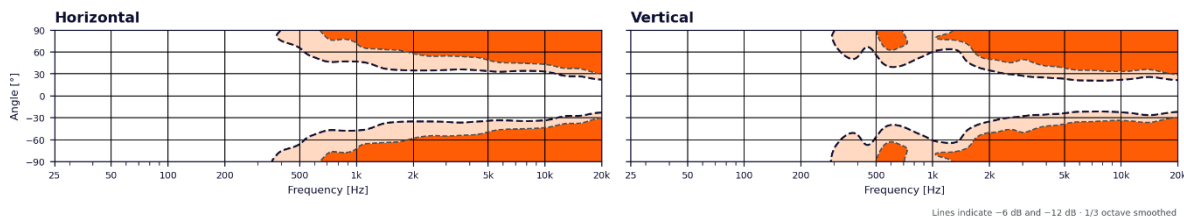

Accessories

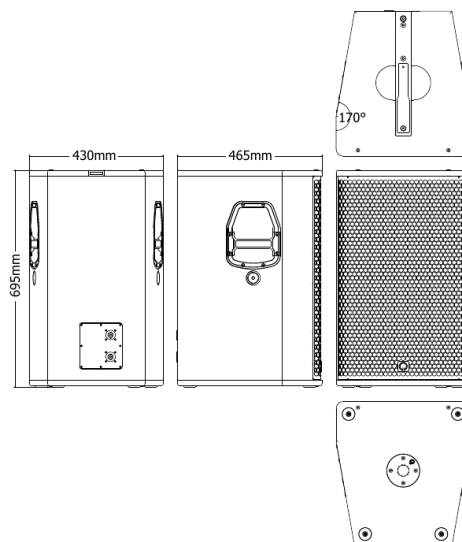

T15

Architectural specifications

- The passive full range point source loudspeaker shall consist of one 15" low frequency driver in a bass reflex design and one 3.5" compression driver, with a nominal impedance of 8 ohms, designed for touring applications as a stand-alone full range loudspeaker.
- The loudspeaker shall only be operated by a dedicated, compatible Quint Audio processor and amplifier (e.g., P9 processor and A42 amplifier) using 1-channel DSP control.
- The cabinet enclosure shall be made from birch plywood with a durable hybrid coating resistant to wear, impact, and weathering.
- The drivers shall be protected by a powder-coated steel grille with acoustically transparent fabric backing.
- The cabinet shall incorporate Quint Audio Quick Lock system on top, a tool-free mountable U-bracket, a 35mm pole mount on the bottom, three ergonomic handles (one on the left, one on the right, one on the top), and rubber feet on the bottom for stability.
- The connection panel on the rear shall be fitted with two NLT4 (4-pole speakON) connectors.
- The dispersion shall be 70° x 40°.
- The peak sound pressure level shall be 137 dB over a frequency range of 33 Hz to 20 kHz (-6 dB). The maximum continuous SPL shall be 120 dB over the same range.
- The dimensions (W x H x D) shall not exceed 430 x 695 x 465 mm and shall weigh no more than 35 kg.
- The loudspeaker shall be the T15 by Quint Audio.